



eNBioAccess-T2



eNBioAccess-T2


Specification

CPU	32 bit/ 400MHz	
Memory	64M SDRAM/ 32M NOR Flash/ 128M NAND Flash	
Display	128 × 160 Color LCD	
Sensor	Optical/ 500 DPI	
Authentication Type	Fingerprint, RF Card, Mobile key (Optional)	
Time	1:1	< 1 sec
	1:N	< 1 sec (1,000 templates)
Template Capacity	20,000 templates (2 templates/ 1 finger, 10,000 users)	
Log Capacity	100,000 logs, 15,000 image logs	
Communication	Bluetooth, TCP/IP, RS232, RS485, Wiegand In/Out, Wireless LAN (Optional)	
Lock	Deadbolt, EM Lock, Door strike, Automatic Door	
Environment	-20 ~ 60 °C / RH 90%	
Certificate	KC, CE, FCC	
Dimensions	68 (W) × 138 (H) × 41.3 (D) mm	


Features

- Bluetooth Support
 - Compatible with BLE mobile key solution (imkey)
- IP65 Certification
 - Dustproof/ Waterproof structure
 - Outdoor installation
- Built-in Camera
 - Storage and monitoring of image logs
- Terminal Status Indicator
 - 3 colors LED indicator
 - Buzzer sound support
- Touch Function key
- Live Finger Detection
 - Optical sensor and algorithm detect fake fingers.

Network Type

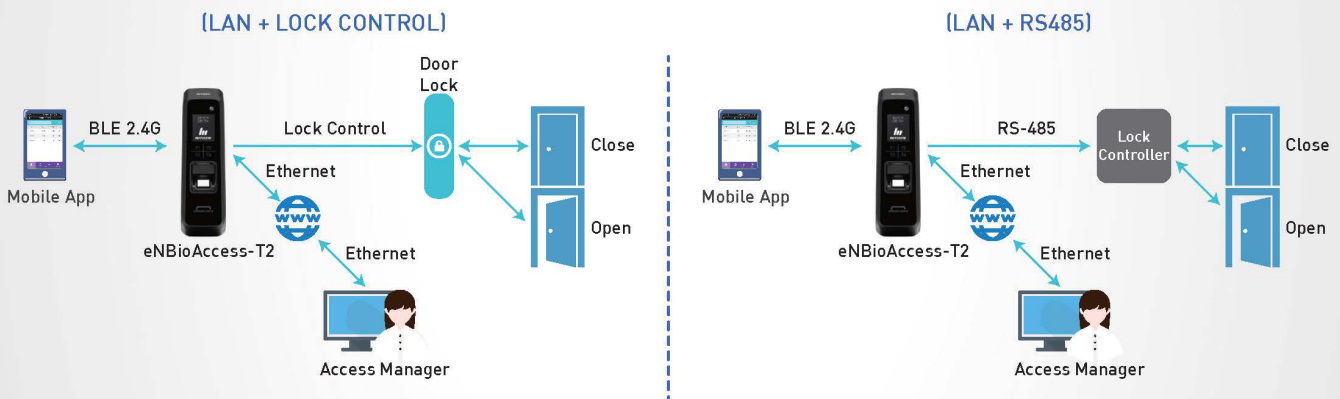

imkey - How it works?

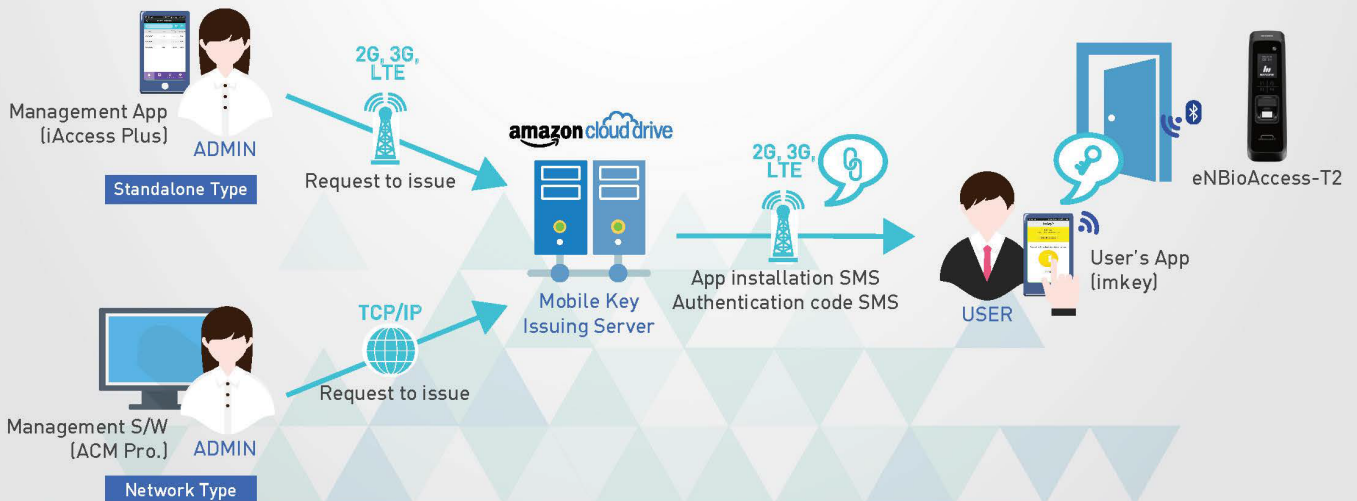

eTOP Solution

P.O.Box. 111645, Abu Dhabi, U.A.E

Tel: (971) 2-650 3433 Fax: (971) 2-650 3553

eTOP Solution

P.O.Box. 488201, Dubai, U.A.E

Tel.: (971) 4-455 9007 Fax: (971) 4-455-3043